

K Series / 25 Series / F Series / 00 Series / 05 Series

BRANSON

TRACTORS



Branson
TRACTORS

Founded
1968

Contract with Cummins Inc.
for ODM
(A-series engine supply)
2001

Branson Tractors
LLC established
2003



KUKJE MACHINERY

ISO 9001; 2000 certificate
obtained from Lloyd's
2004

The first development
for 6-row combine
2011

Parts warehouse established
in Germany (Weber)
2013



BRANSON TRACTORS

Tractor OEM contracted
with McCormick USA
2014

Branson Tractors Ltd UK
established
2015

Acquisition with
Tong Yang Moolsan Co., Ltd.
2016



EU PARTS WAREHOUSE

BRANSON TRACTORS LINE UP

MODEL	CABIN		ROPS	
K SERIES				
25 SERIES				
F SERIES				
MODEL	00 SERIES		05 SERIES	
	2500hL	2500L	2505h	1905h
				

PREMIUM TRACTORS FROM BRANSON

Powerful Performance
& Dependable Quality





PREMIUM TRACTORS

BRANSON K Series

K78



Description



1. Openable rear window
2. 3 Speed PTO
3. Adjustable rim
4. Flat deck
5. Fuel tank located below the cabin allows easy filling
6. 360° cabin visibility
7. New bonnet design for better heat release
8. Designed for mounting front PTO & Hitch

Benefits

A powerful turbo-diesel 4 cylinder engine under a rear-hinged red bonnet is in keeping with Branson's commitment to using high-quality components. The 2.4-litre Branson engine is turbocharged and delivers 74hp at 2,500 RPM. An easy-to-use power shuttle transmission, with efficient power transfer to the selectable 4 wheel drive system, gives excellent traction and powerful drive.



1. Provides more power to enhance three point linkage work.



2. Power shuttle lever enables easy forward and reverse shifting.



3. Powerful climate control system delivers high-quality working environment for the operator.



4. Electro-hydraulic controls are ergonomically designed for convenient operation.



5. Easy access to the button-panel light controls located on the inner pillar of the cab.



6. Exterior three point linkage lift arm control switch located on the rear fender for easy fine control while attaching implements

Main Features

K SERIES	
Models	K78
Gross Engine Power	74hp (54kw)
PTO	Independent 540 / 750 / 1000 RPM
Transmission	Mechanical Synchro Mesh
Gear Shift	16F / 16R (Creep)
Shuttle	Power Shuttle

PREMIUM TRACTORS BRANSON 25-CABIN Series

6225C(Ch) / 5025C



Description



1. Spacious luxury cabin for comfortable operation.
Wide rear view mirrors for operator's convenience
2. Designed for mounting front PTO & Hitch
3. Fuel tank located below the cabin allows easy filling
4. Front and rear work lights for night time work
5. Opening bonnet with gas damper support
6. 52° turning angle makes it easy to operate in narrow areas

Benefits

Branson 25 cab series includes a spacious cab, which allows good visibility and operator comfort. Industry leading turning angle (52°) handles any task with ease in narrow areas.



1. Ergonomic control layout enables easy operation of tractor.



2. Three point linkage and draft controls for precise raising and lowering of implements.



3. Conveniently located levers enable easy control of rear implements.



4. Powerful climate control system delivers high quality working environment for the operator.



5. 52° turning angle makes it easy to operate in narrow areas.



6. High performance PTO and a rear 4-port hydraulic control to drive commercial grade implements.

Main Features

25-CABIN SERIES		
Models	6225C / 5025C	6225Ch
Gross Engine Power	47 ~ 60hp (35 ~ 44.1kw)	
PTO	Independent 584 / 791 RPM	
Transmission	Mechanical Synchro Mesh	Hydrostatic
Gear Shift	12F / 12R	3 Range
Shuttle	Synchro Shuttle	-

PREMIUM TRACTORS

BRANSON 25R Series

5025R



Description



1. Opening bonnet with gas damper support
2. Tilting steering wheel
3. Long-lasting powder-coated steel rear fender
4. 52° turning angle makes it easy to operate in narrow areas
5. Foldable ROPS for easy storage
6. High-quality suspension seat for comfort
7. Heat guard to protect driver
8. Robust 4WD front axle for steep terrain and front loader work

Benefits

Industrial A-Series, naturally-aspirated diesel engine delivers low end torque as well as PTO power. Long-lasting powder-coated steel rear fenders handle difficult tasks with ease.



1. Conveniently located joystick control and the flat operating deck gives a spacious operating environment, fitted with a quality rubber mat.



2. Differential lock system improves traction on slippery surfaces with an easily accessible foot pedal.



3. PTO operation - optional electro-hydraulic:
a) Fully independent
b) Linked to adjustable height of 3PL



4. Foldable ROPS enables low clearance operation, ideal for working under trees.



5. 52° turning angle makes it easy to operate in narrow areas.



6. High performance PTO and a rear 4-port hydraulic control to drive commercial grade implements.

Main Features

25R SERIES	
Models	5025R
Gross Engine Power	47 hp (35 kw)
PTO	Independent 584 / 791 RPM
Transmission	Mechanical Synchro Mesh
Gear Shift	12F / 12R
Shuttle	Synchro Shuttle

PREMIUM TRACTORS

BRANSON F-CABIN Series

F50Cn / F50Chn



Description



1. 4-pillar cabin which enhances drivers visibility
2. Opening bonnet with gas damper support
3. LED-lit cabin for brighter night-working conditions
4. 52° turning angle makes it easy to operate in narrow areas

Benefits

4-pillar cabin enhances drivers visibility and brighter LED lights help with night-working conditions. Cranked lift arms with adjustable hitch stabilizers are fitted as standard.



1. Simple one touch button to engage electronic cruise control.



2. PTO operation - optional electro-hydraulic:
a) Fully independent
b) Linked to adjustable height of 3PL.



3. Operator-friendly, ergonomically-designed joystick.



4. Powerful climate control system delivers a high-quality working environment for the operator.



5. Premium interior insulation produces a quiet working environment.



6. 2 range PTO speed to drive commercial grade implements.

Main Features

F-CABIN SERIES		
Models	F50Cn	F50Chn
Gross Engine Power	48 hp (35.8kw)	
PTO	Independent 560 / 780 RPM	
Transmission	Mechanical Synchro Mesh	Hydrostatic
Gear Shift	12F / 12R	3 Range
Shuttle	Synchro Shuttle	-

PREMIUM TRACTORS

BRANSON F Series

F50Rn / F50hn / F36Rn



Description



1. High-quality suspension seat for comfort
2. Long-lasting powder-coated steel rear fender
3. Opening bonnet with gas damper support
4. Innovative bonnet design for efficient exhaust emissions
5. Foldable ROPS for easy storage
6. 3PL quick release balls for simplified attaching / detaching

Benefits

The F-Series offers powerful, intuitive and selectable four-wheel-drive convenience in a compact package. Cranked lift arms and adjustable hitch stabilizers are fitted as standard. The F-series boasts an incomparable 1500kg rear hitch lift capacity, providing all the lifting power you will require for the size of chassis.



1. Branson diesel engine delivers the highest power in class with outstanding durability and reliability.




2. Dual hydrostatic control pedals for smooth forward/reverse (only for HST model).



3. PTO operation - optional electro-hydraulic:
a) Fully independent
b) Linked to adjustable height of 3PL.



4. 4WD is standard with easy shift lever.

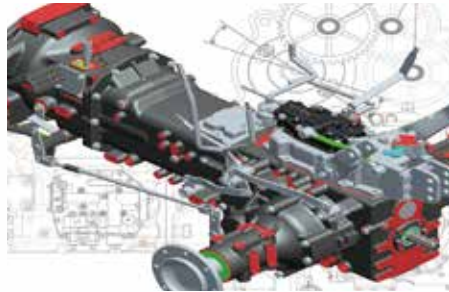

5. A durable transmission is mounted, designed to deliver a linkage force in excess of 1,500kg.



6. The category I hitch has a lift capacity of 1,500kg at the ball end and 1,000kg measured 610mm rearwards behind the balls.

Main Features

F SERIES		
Models	F50Rn / F36Rn	F50hn
Gross Engine Power	35 ~ 48hp (26.1 ~ 35.8kw)	
PTO	Independent Type 560 / 780 RPM	
Transmission	Mechanical Synchro Mesh	Hydrostatic
Gear Shift	12F / 12R	3 Range
Shuttle	Synchro Shuttle	-

PREMIUM TRACTORS

BRANSON 00 Series

2500L / 2500hL



Description



1. Differential lock improves traction on slippery surfaces
2. Long-lasting powder-coated steel rear fender
3. Opening bonnet with gas damper support
4. Roll-over protective structure meets major standard requirements such as SAE and EEC
5. Rear remote valve for implements requiring hydraulic power

Benefits

Complete with two hydraulic pumps, one for the hydrostatic steering and one for the auxiliary hydraulics. Standard differential lock and selectable 4WD ensure full traction even on the toughest grounds.



1. 4WD is standard with easy shift lever.



2. Easy to use PTO is standard with rear 2 speed and mid 1 speed.



3. Simple one touch button to engage electronic cruise control.



4. High ground clearance is excellent for protecting crops.



5. Dual hydrostatic control pedals for smooth forward/reverse (only for HST model)



6. Powerful lift capacity to help you get more done.

Main Features

00 SERIES		
Models	2500L	2500hL
Gross Engine Power	24hp 18kw	
PTO	Live Rear : 560 / 960 RPM Mid PTO : 2500 RPM	
Transmission	Mechanical Sliding Mesh	Hydrostatic
Gear Shift	6F / 2R	2 Range
Shuttle	Constant Mesh	-

PREMIUM TRACTORS

BRANSON 05 Series

2505h



Description



1. Designed for mounting front PTO & Hitch
2. Innovative bonnet design for efficient exhaust emissions
3. Large fuel tank with easy fill point
4. Foldable ROPS
5. Quick and easy installation of 60inch/1,5m mid-mower available

Benefits

The all-new 2505h compact utility tractor offers ultimate performance at unbeatable value with full compliance to stage V emissions standards. We offer a clean and eco-friendly solution to your outdoor lifestyle or commercial requirements alike.



1. Category I with a hitch-lift capacity of 600 kg allows for usage with a wide variety of implements.



2. Dual hydrostatic control pedals for smooth forward and reverse transition.



3. Easy control of PTO operation.



4. Mechanical cruise control lever to maintain constant forward speed during mowing or seeding tasks.



Main Features

05 SERIES	
Models	2505h
Gross Engine Power	25hp (18.4kw)
PTO	Independent Rear PTO : 540 RPM Mid PTO : 2000 RPM
Transmission	Hydrostatic
Gear Shift	2 Range
Shuttle	-

PREMIUM TRACTORS

BRANSON 05 Series

1905h



Description



Easy open hood / Folding ROPS.



Category I 3-point hitch.

Benefits

Whether you are a hobby farmer or a weekend warrior, Branson provides you with the perfect tractor. With front-end loader and mid-mounted mower, you can make your 19hp sub-compact tractor more versatile.



1. Easy to operate forward and reverse pedal.



2. Large operator-friendly driving component.



3. Quick and easy installation of 54inch (1.5m) mid-mounted mower available.



4. Category I 3-point hitch with 499kg lift capacity.



5. Easy control of PTO operation and selective 4WD depending on applications.

Main Features

05 SERIES	
Models	1905h
Gross Engine Power	19 hp (14.2kw)
PTO	Independent Rear PTO : 540 RPM Mid PTO : 2000 RPM
Transmission	Hydrostatic
Gear Shift	2 Range
Shuttle	-

Specifications



Models	Models	K Series	25 Series				F Series		
	Trade Names	K78	6225C	5025C	5025R	6225Ch	F50Cn	F50Rn	F36Rn
Transmission		Mechanical Transmission	Mechanical Transmission			Hydrostatic Transmission	Mechanical Transmission		
Engine HP (kW) @ Rated RPM		74 (54) @ 2500	60 (44.1) @ 2600	48 (35) @ 2600	48 (35) @ 2600	60 (44.1) @ 2600	48.0 (35.8) @ 2600		35 (26.1) @ 2600
PTO HP @ Rated RPM		60	47.5 (35.6)	42	42	47.5 (35.6)	42		30
Drive System		4 Wheel Drive	4 Wheel Drive				4 Wheel Drive		
Max.Forward Speed (Km@RPM)		32.66 @ 3050	27.3 @ 2850			27.9 @ 2850	26.2 @ 2850		
Min.Forward Speed (Km@RPM)		0.78 @ 3050	1.857 @ 2850				1.3 @ 2850		
Engine	Make (STAGE V)	A2400TCI	A2300T3	A2300N2	A2300N2	A2300T3	A2300N2		A1700N2
	Type	Vertical 4 Cycle, Water Cooled, Diesel	Vertical 4 Cycle, Water Cooled, Diesel				Vertical 4 Cycle, Water Cooled, Diesel		
	Displacement (cc)	2392	2286				2286		1714
	Aspiration	Turbocharged w / Inter-cooler	Turbocharged	Natural		Turbocharged	Natural		
	Combustion System	Direct Injection	Swirl Chamber				Swirl Chamber		
Air Cleaner		Dry, Element	Dry, Element				Dry, Element		
Trans mission	Main Shift	Synchro Mesh (Declutch Lever)	Synchro Mesh			Hydrostatic	Synchro Mesh		
	Reverse Method	Power Reverser (Electro-Hydraulic)	Synchro Shuttle			Hydrostatic	Synchro Shuttle		
	Gear Shift	16F/16R (Creep)	12F/12R			3 Range	12F/12R		
	On-the-Go Shifting (Yes/ No/ Partial)	Yes (Shuttle)	Main : Yes Range : No	Partial		Range-No 4WD -No	Main : Yes Range : No		
	Clutch	Wet, Multi Plate (Forward/Reverse Plates: 6/ 6 EA)	Dry Single Plate			N / A	Dry Single Plate		
Brake		Wet, Multidisc	Wet, Multidisc				Wet, Multidisc		
Fuel System	Ground Level Fuel Tank (L)	90	45				27		
PTO		Standard Rear PTO: 540 / 750 / 1000 RPM (Independent Type, CW, 6 Spline shaft) Front PTO: Attachable	Rear PTO: 584 / 791 RPM (Independent Type, CW, 6 Spline shaft) Front PTO: Attachable				Rear PTO : 560 / 780 RPM (Independent Type, CW, 6 Spline shaft) Front PTO : Attachable		
Hydraulics	Main (lpm)	50	42				33.8		
	Steering lpm(L/min)	30	19				18		
SCV		4 (Floating)/ 6 (Detent)	4/ 4 (Detent)				ROPS - Front: - / Rear: 4Port Cabin - Front: 4Port / Rear: 4Port		
3-Point Hitch	Hitch Category	CAT II	CAT II/I	CAT I		CAT II/I	CAT I		
	Hitch Lift Capacity on Ball Ends(kg)	1733	1500				1500		
	Hitch Lift Capacity Measured 24" (610mm) Behind Ball Ends(kg)	1146	1100				1100		
	Control Type	Draft/ Position	Draft/ Position				Draft/ Position		
Steering	Category	Power Assisted Hydrostatic	Power Assisted Hydrostatic				Power Assisted Hydrostatic		
	Turning Degree	40°	52°				Narrow:47°		
	Adjustment	Tilt	3-Stage Tilt				N / A		
Electrics		Generator 12V / 70Ah	ROPS : 12V / 50Ah Cabin : 12V / 70Ah				ROPS : 12V / 50Ah Cabin : 12V / 70Ah		
Tyres	AG : Front/ Rear	F :11.2-24 / R:16.9-30	F : 9.5-16 / R: 13.6-26				ROPS : 8-16, 12.4-24 Cabin : 7-16, 11.2-24		
	Turf : Front/ Rear	-	F : 29x12.5-15 / R: 44x18x20				F : 27x8.50-15 / R: 41x14.00-20		
	IND : Front/ Rear	-	F : 10-16.5 / 12-16.5 R : 420/70-24 / 17.5L-24/6PR				ROPS : 10-16.5, 420/70R24 Cabin : 25x8.50-14, 15-19.5		
Dimensions	Overall Length (mm) (Front weight - 3PL)	4117 (With Front Weight)	3511 (From Front Weight to lower link ball)				3429 (With Front Weight)		
	Overall Width (mm)	1893	1625 ~ 1828				ROPS : 1451 Cabin : 1431		
	Overall Height (mm)	2605	ROPS : 2489 / Cabin : 2410 ~ 2463				ROPS : 2462		ROPS Folded: 2080 Cabin : 2255
	Wheelbase (mm)	2200	1806				1670		
	Ground Clearance (mm)	488	322				ROPS : 390 Cabin : 343		
	Weight (kg)	2955	1960	1950	1742	1968	1592	1396	1383
Options		Front Weight (20kg x 6), Base Weight (70kg)	Front Weight (17kg x 6), Rear Wiper				Front Weight (17kg x 6)		

* Specification are subject to change without notice. Contact your local Branson dealer for more information.




F Series		00 Series		05 Series	
F50Chn	F50hn	2500L	2500hL	2505h	1905h
Hydrostatic Transmission		Mechanical Transmission	Hydrostatic Transmission	Hydrostatic Transmission	
45.0 (33.5) @ 2600		24 (18.0) @ 2600	24 (18.0) @ 2600	25 (18.4) @ 3000	19 (14.2) @ 3000
40		21	18	-	-
4 Wheel Drive		4 Wheel Drive		4 Wheel Drive	
29.2 @ 2850		19.1 @ 2850	21.4 @ 2850	-	
6.5 @ 2850		1.02 @ 2850	6.12 @ 2850	-	
A2300N2		A1100N2		3TNV80F (YANMAR)	3TNV74F (YANMAR)
Vertical 4 Cycle, Water Cooled, Diesel		Vertical 4 Cycle, Water Cooled, Diesel		Water cooled, 4-cycle Diesel	
2286		1175		1267	993
Natural		Natural		Natural	
Swirl Chamber		Swirl Chamber		Swirl Chamber	
Dry, Element		Dry, Element		Dry, Element	
Hydrostatic		Constant Mesh	Hydrostatic	Hydrostatic	
Hydrostatic		N / A		N / A	
3 Range		6F/ 2R	2 Range	2 Range	
Range - No 4WD - No		No		No	
N / A		Dry Single Plate		-	
Wet, Multidisc		Wet, Multidisc		Wet, Multidisc	
27		23		22	25
Rear PTO : 560 / 780 RPM (Independent Type, CW, 6 Spline shaft) Front PTO : Attachable		Rear PTO : 560 / 960 RPM (Live Type, CW, 6 Spline shaft) Mid PTO : 2500 RPM (Sliding mesh, CW, 14 Spline shaft)		Rear PTO : 540 / Mid PTO : 2000 (Electric / Hydro)	
33.8		18.2		15.5	15.8
18		13		10.5	8
Front : 4Port / Rear : 4Port	Front : - / Rear : 4Port	NA / 2		Rear : Option	
CAT I		CAT I		CAT I	
1500		650		600	499
1100		318		480	308
Draft/ Position		Position		Position	
Power Assisted Hydrostatic		Power Assisted Hydrostatic		Power Assisted Hydrostatic	
47°		45°		45°	
N / A		N / A		N / A	
Cabin : 12V / 70Ah	ROPS : 12V / 50Ah	12V / 60Ah		12V / 50Ah	12V / 60Ah
F : 7-16, / R : 11.2-24		F : 7-16 R : 11.2-20		F : 6-12 6PR R : 9.5-16 6PR	-
F : 27x8.50-15 / R : 41x14.00-20		F : 23 x 8.50-12 R : 33 x 12.50-16.5		F : 20X8.00-10 R : 29X12.5-15	F : 18 x 8.50-10 4PR R : 26 x 12.00-12 4PR
Cabin : 25x8.50-14, 15-19.5	ROPS : 10-16.5, 420/70R24	F : 23 x 8.50-12 R : 12-16.5		F : 20X8.00-10 R : 27X12.5-15	F : 18 x 8.50-10 4PR R : 26 x 12.00-12 4PR
3429 (With Front Weight)		3122 (With Front Weight)		2593	2394
Cabin : 1431	ROPS : 1451	1369 - 1419		1164	1130
Cabin : 2255	ROPS : 2462 ROPS Folded:1980	ROPS:2146 - 2330 ROPS Folded:1910		ROPS:2320 ROPS Folded:1620	ROPS:2220 ROPS Folded:1570
1670		1670		1460	1350
Cabin : 343	ROPS : 390	223 - 407		240	F/A 210
Cabin : 1563	ROPS : 1423	923	956	768	650
Front Weight (17kg x 6)		Front Weight (20kg x 3)		Front Weight (20kg x 3)	

* The tyres shown on the photos are editorial use.



ISO 9001

EPA CARB EEC OEC

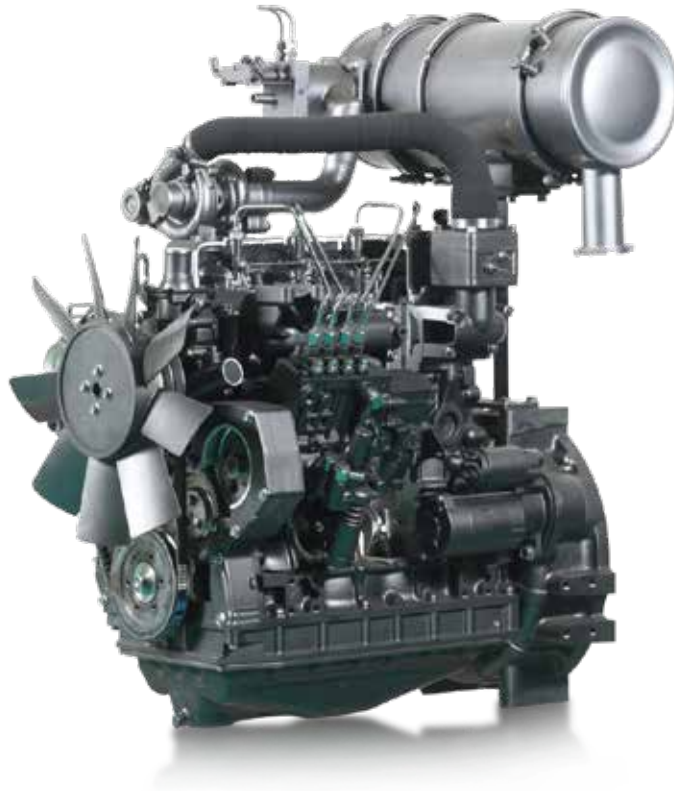

NEW CHANGES, BRANSON TRACTORS



We do it all for you

Providing solutions to your challenges!
Branson is committed to keeping you up and running

HEAD OFFICE
KUKJE MACHINERY CO. LTD

49, Seobu-Ro, Okcheon-Eup, Okcheon-Gun, Chungbuk, Korea
Tel: +82-43-730-1292
Fax: +82-43-730-1493

www.branson-global.com

UK OFFICE
BRANSON TRACTORS LTD

Unit 2b, Waterloo Road Industrial Estate, Bidford-on-Avon, B50 4JH
Tel: +44 (0) 1789 774089
Email: sales@bransontractor.co.uk

www.bransontractor.co.uk